

Pedal Effort Sensor

In Vehicle Pedal Effort Sensor





DECLARATION OF CONFORMITY

We, Auto Test Products Pty Ltd. declare under our sole responsibility that the product Pedal Effort Sensor is in conformity with the provisions of the following Council Directive: 1999/5/EC.

A copy of the Declaration of Conformity is available from <http://www.autotest.net.au>

© AutoTest Products Pty Ltd (AutoTest) [2021].

Copyright in the drawings, information and data recorded in this document (the information) is the property of AutoTest Products. This document and the information are solely for the use of the authorised recipient and this document may not be used, copied, or reproduced in whole or part for any purpose other than that for which it was supplied by AutoTest Products. AutoTest Products makes no representation, undertakes no duty, and accepts no responsibility to any third party who may use or rely upon this document or the information.

Under no circumstances shall AutoTest Products be responsible for any loss of data or income or any special, incidental, consequential or indirect damages howsoever caused. The contents of this document are provided "as is". Except as required by applicable law, no warranties of any kind, either express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose, are made in relation to the accuracy, reliability or contents of this document. AutoTest Products reserves the right to revise this document or withdraw it at any time without prior notice.

Please dispose of batteries properly.

Table of Contents

AutoTest[®] Pedal Effort Sensor

| | | |
|-------|---|----|
| 1. | UNPACKING AND FIRST TIME USE | 4 |
| 2. | FOR YOUR SAFETY | 5 |
| 3. | WARRANTY | 6 |
| 4. | AUTHORISED SERVICE AGENTS:..... | 7 |
| 5. | OPERATION..... | 8 |
| 5.1 | Set-Up..... | 8 |
| 5.2 | Bluetooth Pairing..... | 9 |
| 5.3 | Running the Test | 9 |
| 5.4 | Reviewing a Test..... | 12 |
| 5.5 | Printing a test..... | 12 |
| 6. | SPECIFICATIONS | 13 |
| 6.1 | Hardware Specifications | 13 |
| 6.2 | Features..... | 13 |
| 7. | TROUBLESHOOTING..... | 14 |
| 8. | CALIBRATION PROCEDURE..... | 15 |
| 8.1 | Returning the Sensor for Calibration..... | 15 |
| 8.1.1 | Packaging..... | 15 |
| 8.1.2 | Shipping | 15 |

1. UNPACKING AND FIRST TIME USE

Congratulations on your choice of an AUTOTEST™ Pedal Effort Sensor. Please take the time to read this User's Manual before using the Pedal Effort Sensor in the field. Incorrect or inappropriate use of this instrument may void the warranty. Retain the packing materials for future shipping and transport of the unit as it must be calibrated periodically.

Please complete the warranty registration card and post it to AUTOTEST Products Pty Ltd, alternatively visit our website www.autotest.net.au and complete your warranty registration on line. Your warranty registration ensures that you are kept up to date on any software or hardware changes to your AUTOTEST™ Pedal Effort Sensor. It also helps to provide faster services.

The packing box of your *AutoTest*® Pedal Effort Sensor should contain the following:

1. *AutoTest*® Pedal Effort Sensor (hand-held unit) attached with the pedal sensor
2. User Manual on *AutoTest*® USB
3. Calibration Certificate
4. Warranty Registration Card
5. 4 x AA Batteries

The *AutoTest*® Pedal Effort Sensor is designed to be used in conjunction with the Workshop Pro.
*Workshop Pro and software not included.

2. FOR YOUR SAFETY

Read these simple guidelines. Not following them may be dangerous. Read the complete user guide. Further detailed information is given in this manual.



SWITCH ON SAFELY

Do not switch the device on when wireless device use is prohibited or when it may cause interference or danger.



SWITCH OFF WHEN REFUELING

Do not use the device at a refuelling point. Do not use near fuel or chemicals.



SWITCH OFF NEAR BLASTING

Follow any restrictions. Do not use the device where blasting is in progress.



USE SENSIBLY

Use only in the positions as explained in the product documentation.



QUALIFIED SERVICE

Only qualified personnel may install or repair this product.



ACCESSORIES AND BATTERIES

Use only approved accessories and batteries. Do not connect incompatible products.



WATER-RESISTANCE

Your device is not water-resistant. Keep it dry.



CONNECTING TO OTHER DEVICES

When connecting to any other device, read its user's guide for detailed safety instructions. Do not connect incompatible products.

3. WARRANTY

To ensure prompt warranty service should it be required, please complete warranty registration form, and return to *AutoTest* Products Pty Ltd within 10 days of purchase of the product. *AutoTest* Products or an Authorised Service Centre warrants this product against defects in material and workmanship for a period of 12 months from the original date of purchase. This warranty applies only to products and components supplied by *AutoTest* Products which can be identified by the trade name or logo affixed to them or by other documents. *AutoTest* Products does not warrant any products not supplied by *AutoTest* Products. During the warranty period, *AutoTest* Products or an Authorised Service Centre will repair (or at its option replace), any defective component(s) without charge for labour, provided the product is returned in its original or suitable equivalent container, freight prepaid, to an authorised *AutoTest* Service Centre. Transit insurance and return freight will be at the owner's expense.

In order to obtain calibration, warranty or non-warranty service, ship the product, freight and insurance prepaid to your nearest *AutoTest* Service Centre. Attach to the product your name, address, contact numbers, description of the problem and if a warranty claim, proof of purchase (dated sales receipt or invoice).

AutoTest Products or an Authorised *AutoTest* Service Centre reserves the right to refuse warranty repair if accident, abuse, misuse or misapplication has damaged the product in transit or as a result of service or modifications by other than an Authorised Service Centre, nor are any other warranties expressed or implied, including any regarding merchantability or fitness for any other particular purpose. *AutoTest* Products or an Authorised Service Centre is not responsible for incidental or consequential damages resulting from the breach of any express or implied warranty, including damage to property and, to the extent permitted by law, damages for personal injury.

4. AUTHORISED SERVICE AGENTS:

AUSTRALIA

AutoTest Products
61-63 Parsons St, Kensington, VIC, 3031

Ph: (+61) 3 8840 3000

CHINA

Itach Autotech Corp
Room 703 Building A, Guo Run Commercial Plaza, No.46 West,. Feng Tai District, Beijing 100073

PH: (+_10) 8365 9442

DENMARK

BM Autoteknik A/S
Erhvervsparken 7, 9632 Moldrup,

PH: (+ 45) 8669 2022

MACEDONIA

Velmar d.o.o.
Gjorce Petrov 10, 1000 Skopje, Makedonija.

PH: (+389) 2204 0288

MALAYSIA

Tritech Safety Sdn Bdn
No38, 2nd Floor, Jalan Pandan Indah, Kawasan Industri Ampang Tambahan, 68000 Ampang,
Selangor D.E.

PH: (+603) 4291 0988

NEW ZEALAND

Brake & Transmission NZ
21-27 Omega St., Albany, Auckland

PH: (+ 64) 9414 3205

SOUTH AFRICA

Brakecore Supply Co
5 Oosthuise St, Ermelo, 2350.

PH: (+271) 7819 3412

UNITED KINGDOM

Tecalemit Garage Equip. Co. Ltd
Unit 2, Eagle Road, Langage Bus Pk., Plympton, Plymoth, Devon, PL7 5J

PH: (+017) 5221 9150

The full list of Authorised Service Centres can be found on our website:

<http://www.autotest.net.au/distributors/>

Alternatively, you can contact the **AutoTest Service Department** by

Phone: (+61 3) 8840 3016

5. OPERATION

5.1 Set-Up

Before any testing, insert the included batteries and push the on/off button. The power led should turn on at this point. On start up the power led will light up RED. While the power LED is RED, the workshop pro will not be able to connect to the tablet. The LED will change to GREEN after approximately 30 seconds. This means the unit is ready to connect to a Workshop Pro.

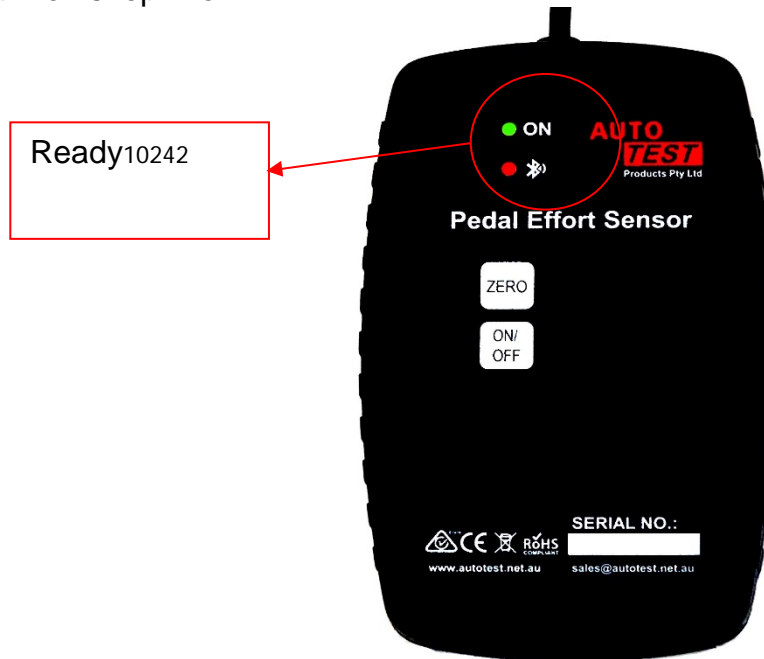


Figure 1

LED State Table

| ON | | Bluetooth (⌘) | |
|-------------------------|-------------------------|---------------------|------------------|
| Solid RED | NOT READY | RED Double Flashing | CONNECTED |
| Solid GREEN | READY | RED Slow Flashing | NOT READY |
| Solid AMBER | FIRMWARE UPDATER | RED/ Fast Flashing | READY |
| RED/GREEN Slow Flashing | 50% Battery | | |
| RED/GREEN Fast Flashing | LOW BATTERY | | |

When the battery is low the ON light will start blinking red (alternating green). At this time the unit will still be functional, but it is recommended that the battery is changed especially when the ON light is blinking quickly.

5.2 Bluetooth Pairing

Upon receiving the Pedal effort sensor or Bluetooth printer, the unit will need to be paired with the Workshop pro.

Pairing occurs in the Bluetooth menu, under settings menu.

The Bluetooth menu will display a list of currently paired devices. At the bottom of the screen is a “Scan for devices” button, press this button to see available devices to pair with.

The pedal effort sensor will be named “PES_xxxxx”, xxxxx is the serial number printed on the front of the device. If none of the devices available being with ‘PES’, the unit could be listed as ‘null’. Check for mac address that begin with 20:XX:XX:XX:XX:XX. Once paired the device will be properly named.

The printer will be named “MPT-II”. Also check for mac address that begin with 00:XX:XX:XX:XX:XX or 8C:XX:XX:XX:XX:XX.

Press and hold the desired device to pair with the device.



Figure 2

5.3 Running the Test

The pedal sensor should be clamped to the brake pedal and the hand-held unit can be placed on the seat or anywhere comfortable.

Press “test” and select test with Pedal Effort Sensor.

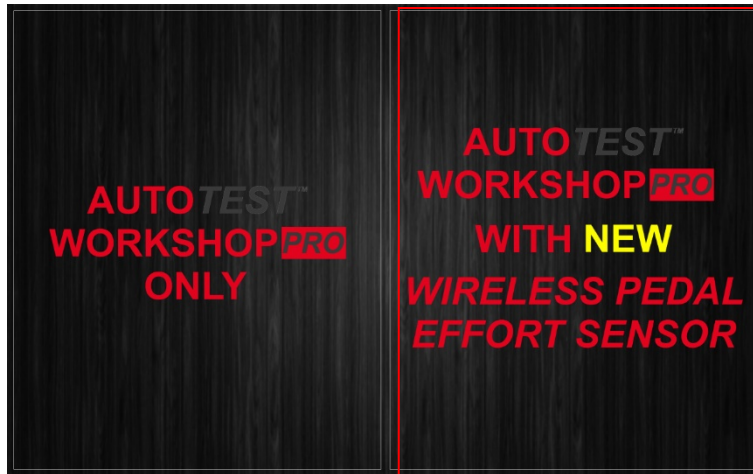


Figure 3

Before beginning the test, press “zero” on the unit to stabilise the measurement. Ensure there is no weight on the brake pedal when this is done. Fill in the test information (examiner ID, and vehicle registration). **DO NOT** press Start until the Workshop Pro is secure. Secure the workshop pro to the passenger seat or to the floor of the car. Ensure that it is secure for the entire duration of the test. Any movement may cause incorrect readings and result in failure of the test. Press “Start” on the bottom right of the screen.

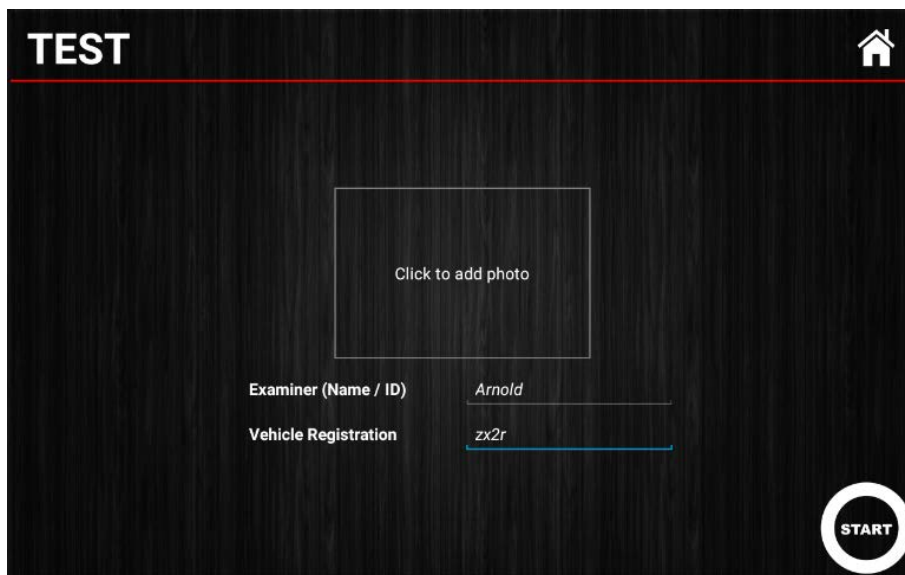


Figure 4

Test Sequence Summary

| Step | Test Status | App Action | User Action |
|-------------|--|--|---|
| 1 | User hits "START" after providing the examiner id and registration number of the vehicle | Test window begins counting down from 5 | Make sure the tablet completely secure/stable and don't bump it |
| 2 | Test setup countdown reaches 0 | Test window prompts user to 'Accelerate Vehicle' | Confirm the test is prompting you to accelerate |
| 3 | Test is prompting user to 'Accelerate Vehicle' | | Begin gently accelerating the vehicle to desired test speed |
| 4 | Vehicle arrives at desired test speed | | Release the accelerator and apply the brake immediately |
| 5 | User begins deceleration | Test window prompts user to 'Decelerate Vehicle' | Continue to apply the brakes until the vehicle comes to a complete stop |
| 6 | Test is prompting user to 'Decelerate Vehicle' | | Continue to apply the brakes until the vehicle comes to a complete stop |
| 7 | Vehicle comes to a complete stop | Test Report is generated and displayed on App screen | Pull over and review test |

5.4 Reviewing a Test

The test report component of the application contains the information relating to tests that have been run (shown in the figure below). The Red graph displays the forward acceleration and the Green graph displays the pedal effort.



Figure 5

The statistics reported include:

- Location (Longitude, Latitude)
- Average/Peak
- Deceleration (displayable in G, %G, ms⁻²)
- Duration
- Speed
- Stopping Distance
- MFDD
- Side shift
- Average Pedal Effort

Click on the values to cycle through the available units (i.e. G, %G, ms⁻²).

5.5 Printing a test

In order to print a test report you need to pair the Workshop Pro with the supplied Thermal Bluetooth Printer, if you haven't done this yet just continue through the following print procedure and the app will redirect you to the Bluetooth Pairing screen when appropriate.

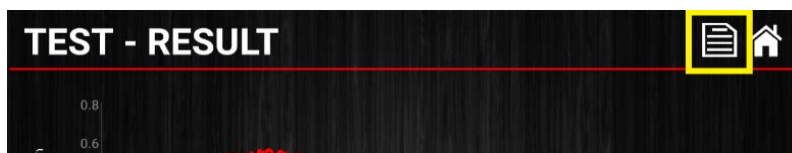


Figure 6

When looking at a test result select the **report icon** from the top right of the report (Figure 6). You will be prompted with a selection panel. Choose **'Print via Bluetooth'** (Figure 7) and you will be asked to select which printer to be used to print the test.

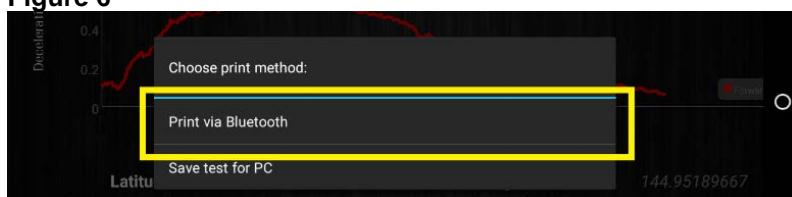


Figure 7

Make sure the printer you intend to print from is turned on and select it from the choose printer dialog. It will begin to print out shortly.

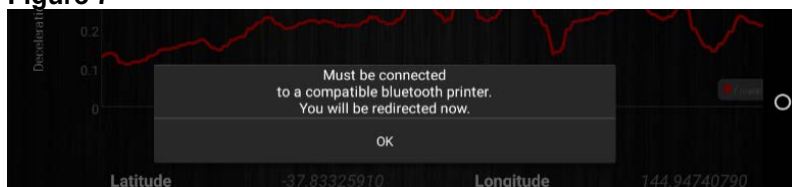


Figure 8

6. SPECIFICATIONS

6.1 Hardware Specifications

Input

- Load cell: accuracy $\pm 2\%$

Output

- Peak pedal effort

Power Source

- Four AA batteries

Temperature Range

- -5°C - 50°C

Humidity

- 25% - 85%, non-condensing

Battery Capacity

- 2450* mA/Hr, over 350 tests

6.2 Features

- Simple two-button operation via a tactile membrane pad
- Lightweight (500grms), dimension (100 x 150 x 40mm)
- Automatic shut-off to preserve battery life
- Calibration is internationally traceable through NATA
- Interval of calibration as determined by the relevant local authority
- 12 months warranty
- Internet support hotline for diagnostics and calibration
- Comprehensive after-sales service and assistance

*battery capacity based on supplied batteries. Capacity could change if different batteries are used.

7. TROUBLESHOOTING

| Common Issues | Solution |
|--|--|
| My pedal is not coming up on the available devices list. | Ensure the ON light is green, and the red light is flashing quickly before scanning for devices. |
| My pedal is paired but I can't start a test. | <p>Check the serial number of the paired device with what is written on the front of the pedal. It is possible that the workshop pro has been paired with the wrong pedal and will require pairing with the correct serial number.</p> <p>Check the lights on the front of the Pedal Effort Sensor. One light must be GREEN and Bluetooth light must be double quick flash every 2 seconds. If the ON light is AMBER, turn the unit on and off, ensure that the 'Zero' button is not pressed when turning on the device.</p> <p>Check the calibration date of the unit. The pedal effort sensor will automatically disable tests after the calibration due date. During this period a pop up will appear alerting user that the Pedal is 'locked'.</p> |
| ON light won't stay green and keeps turning red. | ON light will blink alternating green and red when the batteries are low. The unit will still be functional but if the lights are flashing quickly the unit might not be able to complete a full test. |
| Unit won't turn on even with new batteries. | Check the battery compartment. The batteries may have fallen out when knocked or moved too much. If this has not occurred, please call an Authorised Service Agent. |
| My pedal is giving incorrect readings. | Ensure that there is no weight on the pedal during the start up of the test. You can manually zero the pedal with the button on the front panel. |

Please contact your local Authorised Service Agent (Page 7) for further assistance.

8. CALIBRATION PROCEDURE

The Pedal Effort Sensor must be re-calibrated periodically, this maintains credibility in tests and acceptance of data according to international standards.

The Calibration due date is print on every test receipt.

There are two ways of calibrating - either via your local authorised service centre or by returning the unit to *AUTOTEST* Products.

8.1 Returning the Sensor for Calibration

8.1.1 Packaging

Please remember that you are shipping an electronic instrument. Bubble wrap or foam should surround the unit and should be inserted into a sturdy cardboard box.

8.1.2 Shipping

Labelling - A label noting "Electronic Device - Fragile" should be placed on the box.

Freight Carrier – Container should be sent **freight prepaid**. AutoTest Products has no preference on freight carriers. However, should expedient delivery be required ensure you contact your freight carriers for confirmation.

Ship to: Ship to: The Service Department, AutoTest Products Pty Ltd, 61-63 parsons St, Kensington, Victoria 3031 Australia. Phone: +61 3 8840 3016; or to your nearest service distributor. A full list of distributors is available on our website.

NOTES:

Copyright 2020 *AutoTest* Products Pty Ltd ABN 47 005 712 005.

® denotes a trademark owned by *AutoTest* Products Pty Ltd ABN 47 005 712 005.



AutoTest® Products Pty Ltd

61-63 Parsons St Kensington VIC 3031 Australia

Phone: (+61 3) 8840 3000

Service: (+61 3) 8840 3016 service@autotest.net.au

Sales: (+61 3) 8840 3017 sales@autotest.net.au

www.autotest.net.au